

# SUPREME TOP



ISO 9001:2015




ISO 14001:2015



**ULTRAFIT SUPREME TOP** Paint Protection Film has everything you would want, and then some. Designed to be one of the clearest films out there in the market, you will notice instantly how it is basically invisible due to its outstanding gloss and shine.

**ULTRAFIT SUPREME TOP** also delivers with a flexible film that stretches to meet the different curves and edges of cars to give installers that installation-friendly film that everyone is looking for. With its advanced hydrophobic features as well as superior self-healing ability, it is the definition of a reliable paint protection film. Once you have experienced **ULTRAFIT SUPREME TOP** firsthand, you will come to appreciate a paint protection film that truly lives up to its potential.

## Product Structure

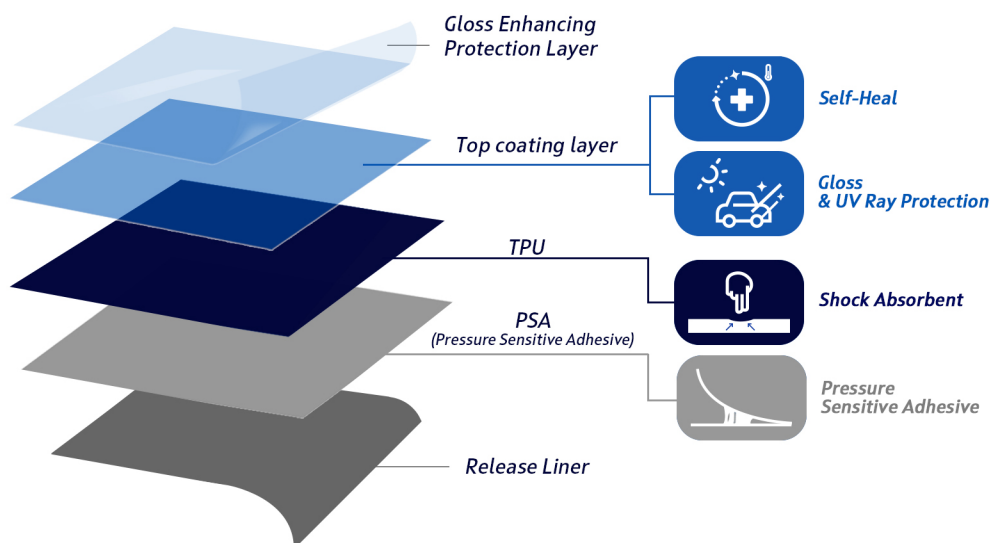

## Product Breakdown

Property		Results	Units of Measurement
Appearance	Gloss Value	>91% (BS EN ISO 2813)	20 Degrees
		>94% (BS EN ISO 2813)	60 Degrees
	Haze	>0.5%	Degree
Top Coating	Water Angle	70 Degrees (Contact Angle)	Degree
Adhesion	180 Degree (N/m)	0.8+-0.05 kgf/25mm (After 5 min)	kgf/25mm
		1.2+-0.1 kgf/25mm (After 5 hours)	kgf/25mm
		>1.5 kgf/25mm (After 24 hours)	kgf/25mm
Resistance	Water + Soap	No Detrimental Effect	N/A
	MEK(Acid)	No Detrimental Effect	N/A
	Gasoline	No Detrimental Effect	N/A
	Diesel	No Detrimental Effect	N/A
	Cabreta Cleaner(Oil)	No Detrimental Effect	N/A
	Coffee	No Detrimental Effect	N/A
Mechanical	Taber Abrasion	<3.5g (ASTM D-1044)	1000g Weight
	Tensile Strength	9000	psi
	Elongation at Break	410	%
Outdoor Weathering Test (6500W Xenon Arc)	Irradiance	0.51 W/m2 (340nm)	1000 hours
	Temperature	65°C	1000 hours
	Humidity	50%	1000 hours