

VIVID FORTE Series

VF 05

First Class Sustainability

Maintaining an average of 88% in the solar infrared ray test spectrometer (780nm – 2500nm), the **Vivid Forte** meets the high standards of the market today to display its creditability to our clients.

VLT  5%

TSER  69%


IR REJECTION  88%

SPECIFICATIONS

Visible Light Transmission	5 %
Visible Light Reflection (Int) / (Ext)	6 % / 7 %
UV Rejection	99 %
IR Rejection	88 %
Solar Heat Gain Coefficient	0.31
Shading Coefficient	0.45
Total Solar Energy Rejection	69 %

*Thickness: 2 Mil

AUTOMOTIVE FILMS

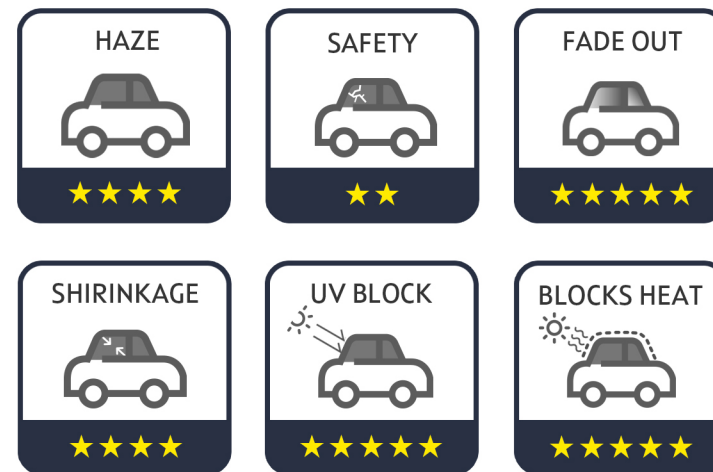

ISO 9001:2015



ISO 14001:2015



VIVID FORTE Series

VF 15

First Class Sustainability

Maintaining an average of 88% in the solar infrared ray test spectrometer (780nm – 2500nm), the **Vivid Forte** meets the high standards of the market today to display its creditability to our clients.




SPECIFICATIONS

Visible Light Transmission	15 %
Visible Light Reflection (Int) / (Ext)	6 % / 7 %
UV Rejection	99 %
IR Rejection	88 %
Solar Heat Gain Coefficient	0.36
Shading Coefficient	0.49
Total Solar Energy Rejection	64 %

*Thickness: 2 Mil

AUTOMOTIVE FILMS

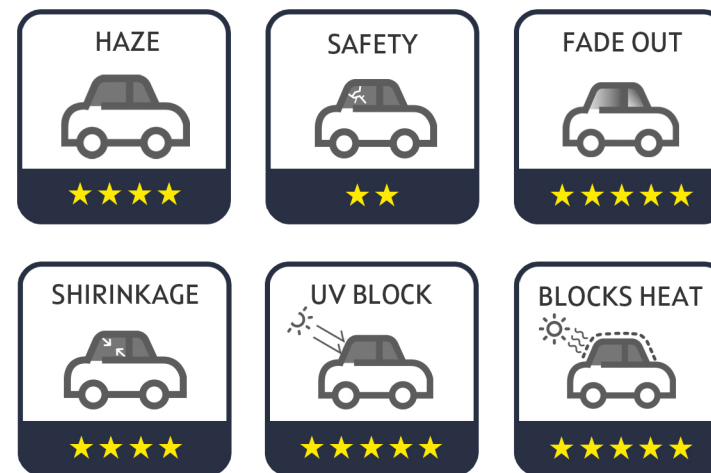


VIVID FORTE Series

VF 25

First Class Sustainability

Maintaining an average of 88% in the solar infrared ray test spectrometer (780nm – 2500nm), the **Vivid Forte** meets the high standards of the market today to display its creditability to our clients.

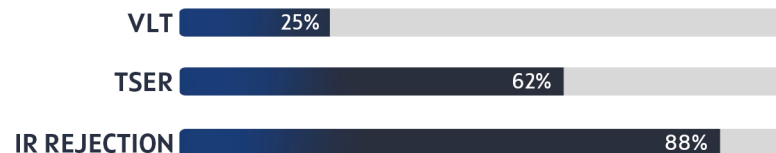


SPECIFICATIONS

Visible Light Transmission	25 %
Visible Light Reflection (Int) / (Ext)	6 % / 8 %
UV Rejection	99 %
IR Rejection	88 %
Solar Heat Gain Coefficient	0.38
Shading Coefficient	0.51
Total Solar Energy Rejection	62 %

*Thickness: 2 Mil

AUTOMOTIVE FILMS

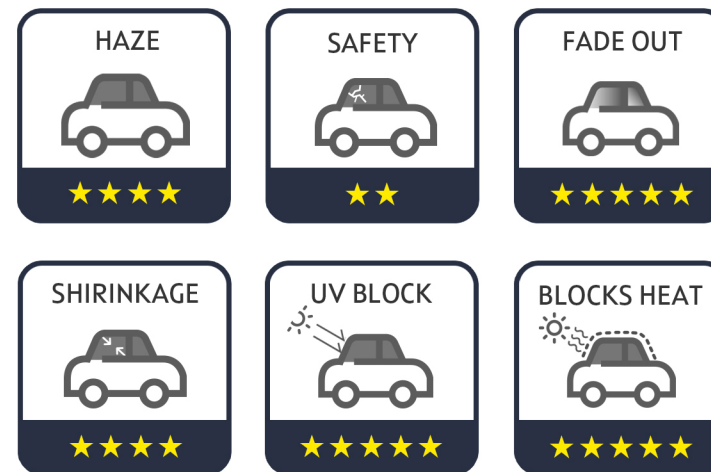


VIVID FORTE Series

VF 35

First Class Sustainability

Maintaining an average of 88% in the solar infrared ray test spectrometer (780nm – 2500nm), the **Vivid Forte** meets the high standards of the market today to display its creditability to our clients.

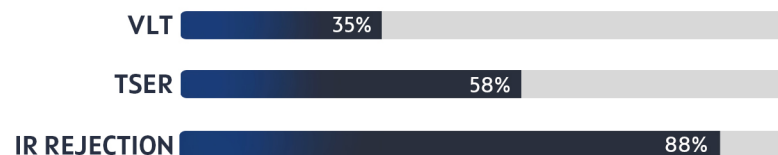


SPECIFICATIONS

Visible Light Transmission	35 %
Visible Light Reflection (Int) / (Ext)	7 % / 8 %
UV Rejection	99 %
IR Rejection	88 %
Solar Heat Gain Coefficient	0.42
Shading Coefficient	0.55
Total Solar Energy Rejection	58 %

*Thickness: 2 Mil

AUTOMOTIVE FILMS

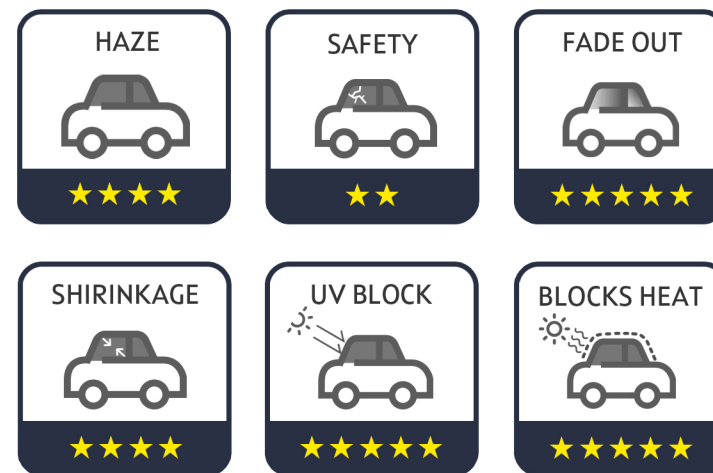

ISO 9001:2015



ISO 14001:2015




VIVID FORTE Series

VF 50

First Class Sustainability

Maintaining an average of 88% in the solar infrared ray test spectrometer (780nm – 2500nm), the **Vivid Forte** meets the high standards of the market today to display its creditability to our clients.

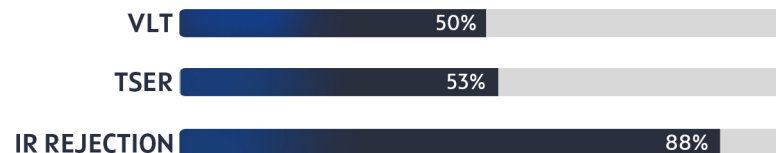

SPECIFICATIONS

Visible Light Transmission	50 %
Visible Light Reflection (Int) / (Ext)	8 % / 9 %
UV Rejection	99 %
IR Rejection	88 %
Solar Heat Gain Coefficient	0.47
Shading Coefficient	0.61
Total Solar Energy Rejection	53 %

*Thickness: 2 Mil

AUTOMOTIVE FILMS



ISO 9001:2015



ISO 14001:2015




VIVID FORTE Series

VF 70

First Class Sustainability

Maintaining an average of 61% in the solar infrared ray test spectrometer (780nm – 2500nm), the **Vivid Forte** meets the high standards of the market today to display its creditability to our clients.

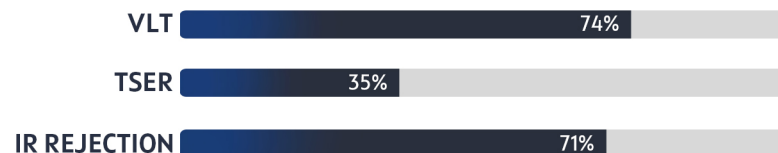

SPECIFICATIONS

Visible Light Transmission	74 %
Visible Light Reflection (Int) / (Ext)	8 % / 9 %
UV Rejection	99 %
IR Rejection	71 %
Solar Heat Gain Coefficient	0.65
Shading Coefficient	0.79
Total Solar Energy Rejection	35 %

*Thickness: 2 Mil

AUTOMOTIVE FILMS

