



WinCrest Series

WinCrest Nano Ceramic

SPECIFICATIONS

Visible Light Transmission	80 %
Visible Light Reflection (Int) / (Ext)	7 % / 7 %
UV Rejection	99 %
IR Rejection	75 %
Solar Heat Gain Coefficient	0.67
Shading Coefficient	0.76
Total Solar Energy Rejection	36 %

VLT 80%


TSER 36%

IR REJECTION 75%

Dual Efficiency in Blue

The true definition of efficiency, our WinCrest Nano-Ceramic merges protection of potential scratches and rejection of harmful radiation into one to create a film that gives you best of both worlds.

AUTOMOTIVE FILMS

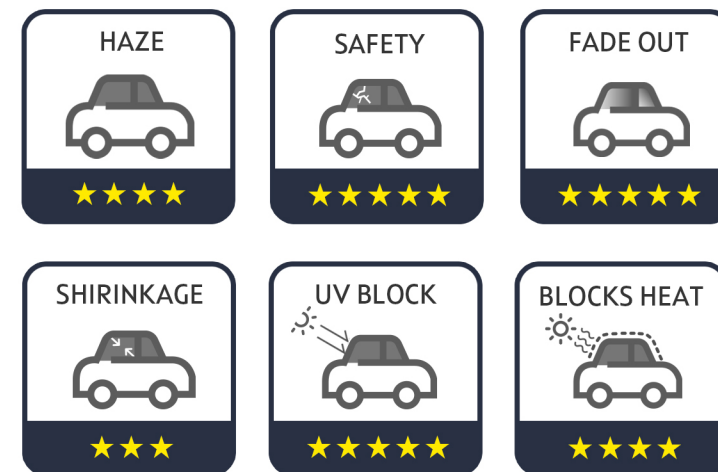

ISO 9001:2015



ISO 14001:2015

