

Technical Data Sheet

Paint Protection Film



SUPREME TOP

Information


ULTRAFIT SUPREME TOP is a durable gloss film with self-healing and pressure-sensitive adhesive. It protects against chips and scratches while its hydrophobic surface repels water and dust, keeping your vehicle glossy and clean.

Recommended Shelf Life 2 years from date of purchase*
 Recommended Storage Conditions 72°F (22°C) @ 50% RH

Characteristics

- Clear Gloss
- Hydrophobicity
- Shock absorbent
- Self-Heal

Product Structure

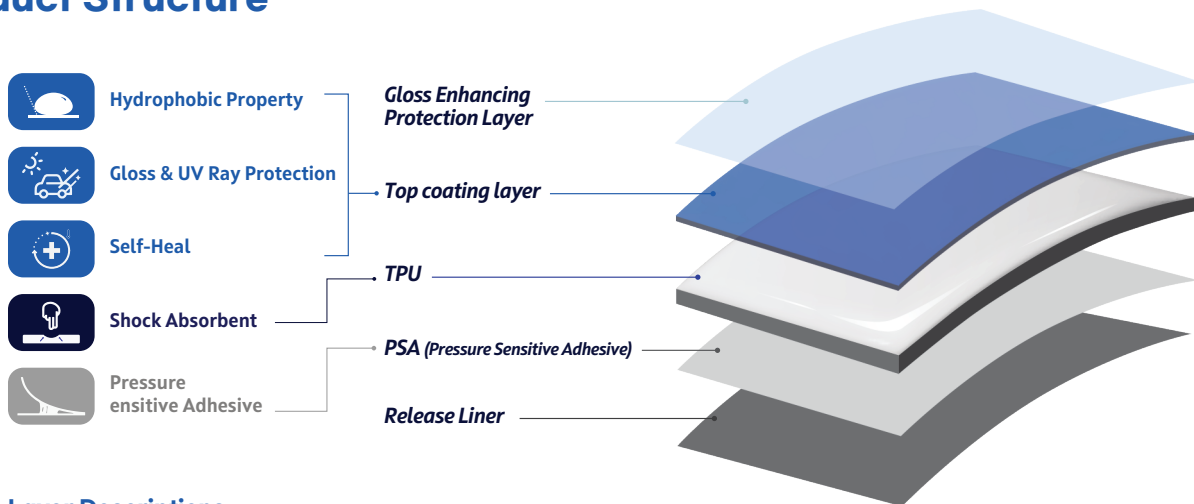

Layer Descriptions

TPU High-clarity and impact-resistance **Product Thickness** 8mil

PROPERTIES		TYPICAL VALUES	STANDARD
Peel Adhesion		1.7 ±0.4 kg/in ² (30 min)	ASTM D3330
		2.2 ±0.5 kg/in ² (1 hr)	
Gloss		>80 ±2	ISO 2813
Haze		<1 ±0.1%	ASTM D-1003
Tensile Strength		5,000 ±250 psi	ASTM D-412
		34.47 ±2 Mpav	
Elongation		>150	ASTM D-412
Durability		ΔE ≤2 (1,000 hr)	ASTM G154
Q-UV	UVA Bulb	<1%	8 hours 50°C UV exposure
		<1%	4 hours 60°C condensation

* If installing film after recommended shelf-life, re-certification by ULTRAFIT is required.

Notice

The performance representations and suitability for use described in this Technical Data Sheet are intended as a guide only. Since the specific conditions of product use are known only to the user, it is the user's responsibility to determine whether the product is suitable its intended application.