

Technical Data Sheet

Surface Protection Film



CounterPro Natural

Information


ULTRAFIT **CounterPro Natural** is natural matte surface protection film engineered to preserve the original countertop appearance while providing a refined low-glare finish, excellent scratch resistance, and enhanced surface durability. SGS-tested for antimicrobial performance and free from heavy-metal hazardous substances.

Recommended Shelf Life 2 years from date of purchase*
 Recommended Storage Conditions 72°F (22°C) @ 50% RH

Characteristics

- Antimicrobial
- Heavy-metal free
- Clear Matte
- Hydrophobicity
- Shock absorbent
- Self-Heal

Product Structure

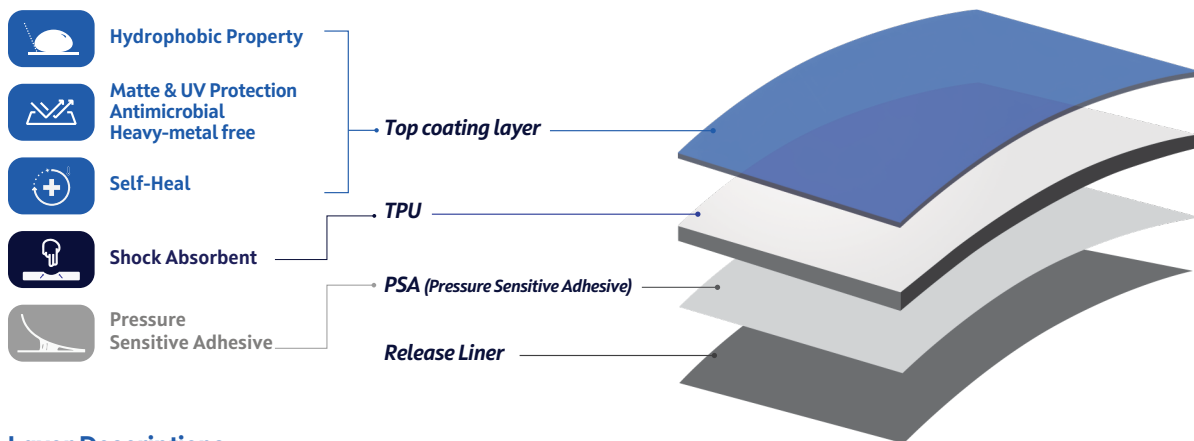

Layer Descriptions

TPU High-clarity and impact-resistance **Product Thickness** 8mil

PROPERTIES		TYPICAL VALUES	STANDARD
Peel Adhesion		1.7 ±0.4 kg/in ² (30 min)	ASTM D3330
		2.0 ±0.5 kg/in ² (1 hr)	
Gloss		N/A	ISO 2813
Haze		N/A	ASTM D-1003
Tensile Strength		8,500 ±850 psi	ASTM D-412
		58.6 ±5.8 Mpa	
Elongation		>200	ASTM D-412
Durability		ΔE ≤2 (1,000 hr)	ASTM G154
Q-UV	UVA Bulb	<1%	8 hours 50°C UV exposure
		<1%	4 hours 60°C condensation

* If installing film after recommended shelf-life, re-certification by ULTRAFIT is required.

Notice

The performance representations and suitability for use described in this Technical Data Sheet are intended as a guide only. Since the specific conditions of product use are known only to the user, it is the user's responsibility to determine whether the product is suitable its intended application.

